




Schottky Diode

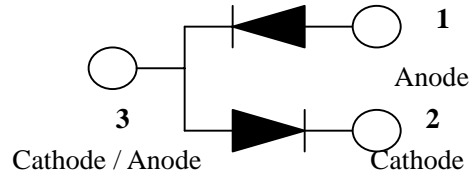

肖特基二极管(FHBAS40-04)

MAXIMUM RATINGS 最大额定值

Rating 额定值	Symbol 符号	Value 值	Unit 单位
Reverse Voltage 反向电压	V_R	40	Vdc
Peak Forward Current 正向峰值电流	I_F	350	mAdc
Peak Forward Surge Current 正向最大浪涌电流 t 1s	$I_{FM(surge)}$	1.5	Adc

THERMAL CHARACTERISTICS 热特性

Characteristic 特性	Symbol 符号	Max 最大值	Unit 单位
Total Device Dissipation FR-5 Board(1) $T_A=25$	P_D	225	mW
Total Device Dissipation Alumina Substrate,(2) $T_A=25$ 总耗散功率 氧化铝衬底	P_D	300	mW
Junction and Storage Temperature 结温和储存温度	T_J, T_{stg}	150 , -55 to +150	

DEVICE MARKING 打标

FHBAS40-04=6S

ELECTRICAL CHARACTERISTICS 电特性($T_A=25$ unless otherwise noted 如无特殊说明, 温度为 25)

Characteristic 特性	Symbol 符号	Min 最小值	Max 最大值	Unit 单位
-------------------	-----------	---------	---------	---------

OFF CHARACTERISTICS 截止电特性

Reverse Voltage Leakage Current 反向漏电流($V_R=25Vdc$)	I_R	—	1.0	μAdc
Reverse Breakdown Voltage 反向击穿电压($I_{BR}=10 \mu Adc$)	$V_{(BR)}$	40	—	Vdc
Forward Voltage 正向电压 ($I_F=20mAdc$) ($I_F=200mAdc$)	V_F	—	370 600	mVdc
Total Capacitance 电容($V_R=1V, f=1.0MHz$)	C_T	—	5	pF

- FR-5=1.0 × 0.75 × 0.062 in.
- Alumina=0.4 × 0.3 × 0.024 in. 99.5% alumina.



SOT-23 封装外形尺寸 (SOT-23 DIMENSION)

